

Project:
Type:
Date:
Product Code:
Approval:



Performance, functionality and long lasting quality.

BFHA - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Contractor-grade, surface and suspended mount fluorescent high bay fixture. It is ideal for indoor use, where high-efficiency, high-performance and ease of installation are required.

FEATURES

- High-reflectance white steel reflector standard
- Available with 3, 4, 6, 8 or 10 lamp configurations
- Available in T5 or T8

OPTIONS

- Specific ballast requirements (Ballast Factor)
- Occupancy and dimming controls
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- 3, 4, 6, 8 or 10 lamps available
- T5 or T8
- Bulk or individually packaged

APPLICATIONS

- Manufacturing
- Storage areas
- Warehouse facilities

APPROVALS

- CSA approved for Canada and USA
- UL certified for Canada or USA

OPTICS

Pre-painted body in high-reflectance white. Multi-faceted reflector is manufactured to achieve optimal lamp performance. Optional reflector is available in high-reflectance white steel, white aluminum or specular aluminum. T5 and T8 light sources are available.

ELECTRICAL

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Fixture is available in 120 - 277VAC and 347V options. Lamp retention through rotary lamp holders.

MOUNTING

Can be row-mounted using a suspended or surface-mount configuration. Holes provided for convenient surface mounting, aircraft cable or S-hook chain-mounting.


CONSTRUCTION

Pre-painted, high reflectance white body is precision bent for added strength and rigidity. Welded end brackets with powder coated white finish for superior durability. Knock-outs provide easy through wiring for row-mounted applications.




PRODUCT DIMENSIONS

End View

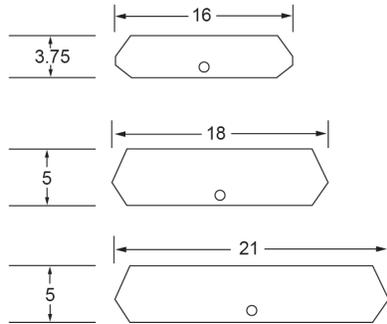

Side View

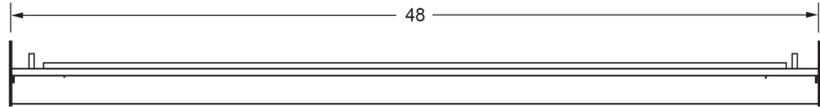

PRODUCT KEY

Fixture Type	Fixture Size	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFHA	4'	<input type="text"/> LP	<input type="text"/> W	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
		3	28	T5	120	Normal (N)	
		4	32	T8	120/277 (UNV)	High (H)	
		6	54		347	Low (L)	
		8					
		10					

OPTIONS

<p>Battery Back-Up (Needs to be specified)</p> <p>Lens L55 - Clear Acrylic Lens L26 - Clear Polycarbonate Lens</p> <p>Wireguard G1 - Wireguard Heavy Duty, Painted White</p>	<p>Reflector R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92%</p> <p>Sensors W12 - Motion Sensor - 10C W13 - Motion Sensor - 40C</p>	<p>Wire W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> <p>Hangers M1 - Speedy Hanger (V-Bracket) M2 - Speedy Hanger & Aircraft Cable 5FT M4 - Aircraft Cable "V-Hanger", 18 Inch</p>
---	---	---

