

Project:
Type:
Date:
Product Code:
Approval:



Stylish performance with fluorescent lighting.

BFHE - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Industrial-grade, suspended-mount fluorescent high bay fixture. It is ideal for indoor use, where high-efficiency, high-performance and ease of installation are required. Its multi-faceted reflector makes it ideally suited for high bay applications.

FEATURES

- Available in 4' or 8' lengths (custom sizes available)
- Powder coated white (custom colours available)
- Available with 2, 3, 4, 6 or 8 lamp configurations
- T5 or T8 lamps

OPTIONS

- 4' or 8' lengths available
- Continuous row-mounting available
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- 2, 3, 4, 6 or 8 lamps available
- Straight blade louver

APPLICATIONS

- Retail stores
- Storage areas
- Warehouse facilities

APPROVALS

- ETL listed product

OPTICS

Powder coated body in high-reflectance white. Multi-faceted reflector is manufactured to achieve optimal lamp performance. 1 to 4 lamp cross sections available to suit most applications. T5 and T8 light sources are available.

ELECTRICAL

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Lamp retention through rotary lamp holders.

MOUNTING

Can be row-mounted using a suspended or surface-mount configuration. Optional mounting is available with aircraft cable, chain or stem mounting.


CONSTRUCTION

Powder coated white body with optional custom colours available. Knock-outs provide easy through wiring for row-mounted applications.




PRODUCT DIMENSIONS

End View



Side View

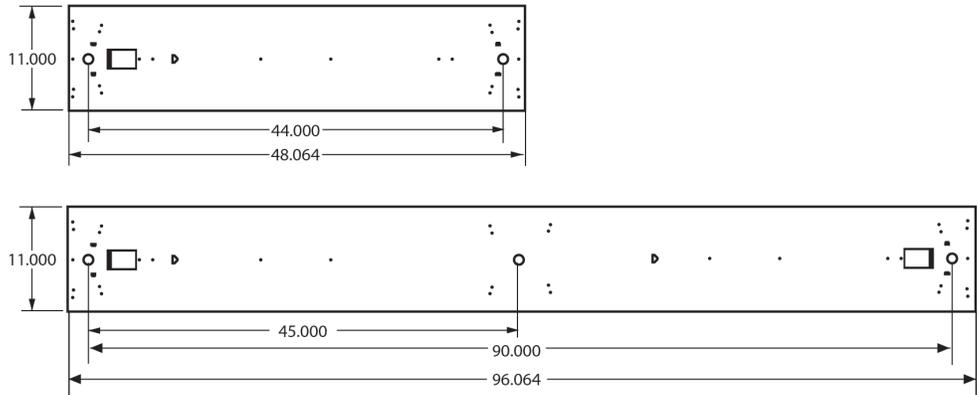

PRODUCT KEY

Fixture Type	Fixture Length	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFHE		LP	W				
	4'	2	28	T5	120	Normal (N)	
		3	32	T8	120/277 (UNV)	High (H)	
		4	54		347	Low (L)	
	8'	4					
		6					
		8					

OPTIONS

<p>Battery Back-Up (Needs to be specified)</p> <p>Hangers M3 - Aircraft Cable "Y" Toggle With Cable Gripper (5, 10 and 15') M25 - Surface Mounting Bracket</p>	<p>Reflector R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92%</p> <p>Sensors W12 - Motion Sensor - 10C W26 - Motion Sensor with Photocell</p>	<p>Wire W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> <p>Louvers J32 - Baffle Radial Blade 2" Spacing, 9.625" Wide, 47.75" Long</p>
--	--	---

