


<b>Project:</b>
<b>Type:</b>
<b>Date:</b>
<b>Product Code:</b>
<b>Approval:</b>

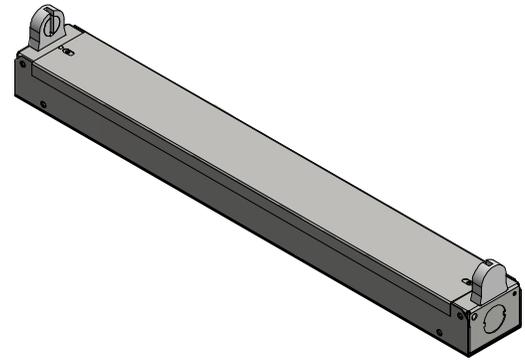

*Durability, and cost-effective fluorescent lighting.*

**BFSPM T8 - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE**

Contractor-grade, fluorescent surface and suspended mount strip fixture. It is ideal for indoor use, where energy-efficiency, performance and ease of maintenance is essential. Its rugged design and energy-efficiency make it ideally suited for task lighting or general illumination applications.

**FEATURES**

- 1.5' length available
- Only available in 1 lamp configuration
- Can be row mounted

**OPTIONS**

- 1.5' length available
- Only available in 1 lamp configuration
- Continuous row-mounting available
- 347V options available

**APPLICATIONS**

- Coves
- Display cabinets
- Manufacturing
- Task lighting

**APPROVALS**

- ETL listed product

**OPTICS**

Pre-painted body in high-reflectance white. T8 fluorescent light source is standard. Optional wireguard is available.

**ELECTRICAL**

All components have met all regulatory approvals. Fixture is available in 120 - 277VAC and 347V options. Lamp retention through rotary lamp holders.

**MOUNTING**



Holes provided for convenient surface mounting or S-hook chain-mounting. Can be row-mounted using a suspended or surface-mount configuration.

**CONSTRUCTION**

Pre-painted, high reflectance white body is precision bent for added strength and rigidity. End caps are fastened by screws allowing the flexibility of repositioning to act as joiners for raceway wiring. Shallow fixture design provides a clean appearance for many environments.



**PRODUCT DIMENSIONS**

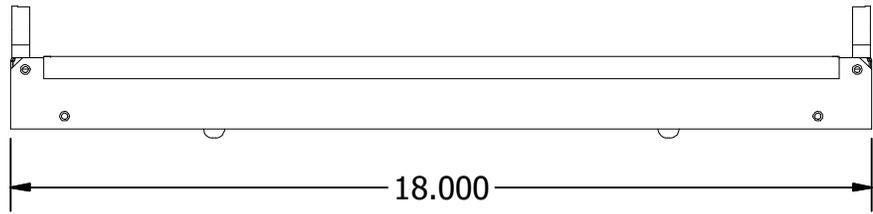

**PRODUCT KEY**

Fixture Type	Fixture Length	Number of Lamps	Lamp Wattage	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFSPM	1.5'	1	15W	T8			SK7

UNV  
347

Low (L)  
Normal (N)

**Options**  
SK7 - Low Profile Sockets