



Project

Nomenclature

Type

Date

Approval

Notes

The BLSPT is an extended series of our BLSP LED linear strip fixture designed for surface and suspended mounting. Its true length is well suited for indoor use where high efficiency, row-mountable task lighting is required. Its true length design makes it an ideal replacement for row mounting applications.

Luminaire Summary

Features

- Operating temperature ranges available from -40C to 40C
- L70 of 99,000+ hours, L90 of 30,000+ hours
- Standard 0 - 10V dimming
- Available in 2700K, 3000K, 3500K, 4000K, 5000K and 6500K
- Lumen packages are available ranging from 1' 1.125L (1125lm) to 8' 23.0L (22332lm)

Construction

- Manufactured in Ontario, Canada
- Powder-coated in high reflectance gloss white (other colours available)
- Precision bent for added strength and rigidity
- Welded end caps

Approvals

- ETL certified to UL Canada and United States standards
- Made with UL Listed components
- Dry and Damp Environment Rated
- DLC Listed

Electrical

- Available in 120-277V, 120-347V, 347V and 480V

Mounting


- Holes provided for V-hangers, S-hook chain-mounting, or aircraft cables
- Optional pendant-mount and row-mount brackets
- Knockouts provided for row-mounting

Options

- Custom lengths available
- Wireless Controls Available
- 90 and 95+ CRI Options Available
- 120-347V(UN3) Available

Ordering Information

Fill in the fields below with your product selections. If you need help with this section, [contact your local sales professional](#).

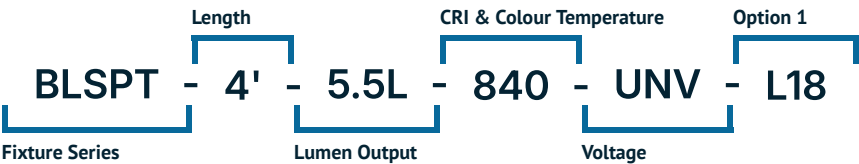

1	2	3	4	5
BLSPT				

Series	Lumen Output				CRI	Colour Temp	Voltage
BLSPT	1' 1.125L	(1125lm)	4' 10.5L	(10347lm)	8 - 80 CRI	27 - 2700K	UNV - 120-277V
	1' 1.375L	(1375lm)	4' 11.5L	(11203lm)	9 - 90 CRI	30 - 3000K	UN3 - 120-347V
	2' 1.75L	(1750lm)	8' 5.0L	(5252lm)	1 - 95+ CRI	35 - 3500K	347 - 347V
	2' 2.25L	(2250lm)	8' 7.0L	(7361lm)		40 - 4000K	480 - 480V
	2' 2.75L	(2750lm)	8' 9.0L	(9420lm)		50 - 5000K	
	4' 2.5L	(2565lm)	8' 11.0L	(11424lm)	65 - 6500K		
	4' 3.5L	(3631lm)	8' 13.0L	(13375lm)			
	4' 4.5L	(4670lm)	8' 15.0L	(15273lm)			
	4' 5.5L	(5683lm)	8' 17.0L	(17119lm)			
	4' 6.5L	(6669lm)	8' 19.0L	(18908lm)			
	4' 7.5L	(7628lm)	8' 21.0L	(20642lm)			
	4' 8.5L	(8561lm)	8' 23.0L	(22332lm)			
	4' 9.5L	(9467lm)	**L - Custom lumen package				

6

Options

Lenses

L18	Frosted Lens
-----	--------------

Cords

W3xx	White 16/3 (Specify Length)
W4xx	Black 16/3 (Specify Length)
W59xx	White 16/5 (Specify Length)
W***	Other Options Available*

Key.	Cord Length.	Key	Cord Length
6	6FT	15	15FT
10	10FT	20	20FT

Ex. **W406** would be 16/3 Black, 6FT

Motion Sensors

W26	Photocell Motion Sensor
W57	Dimming Motion Sensor (dims to 50% when unoccupied)
W53*	On/Off
W8*	High/Low
WX16	Microwave Dimmable Sensor
W**	Other Options Available*

Wire Guard

G1	Heavy Duty White
G5	Heavy Duty Black

Finish

BLANK	Standard Gloss White
C5	Matte Black
CUSTOM*	Custom Colour Choice

Dimming

B11	0-10V Dimming Leads
B12	Line Voltage Dimming
B27	Dim-to-off Driver
B**	Other Options Available*

Controls

WC10*	Encelium Wireless Controls
WC18*	NX Wireless Controls
WC19*	Avi-on Wireless Controls
WC22*	JDRF Wireless Controls

Emergency Driver

B17	UL924 6W Battery Back-up
B24	UL924 10W Battery Back-up
B38	UL924 15W Battery Backup
F8	UL924 Emergency Relay

Packaging

BLANK	Individually Boxed on Pallets
P0	Bulk Packaging
P**	Other Options Available*

Mounting

M1	V-Hangers
M2xx	V-Hanger with Aircraft Loop Cables
M3xx	Y-Toggle Aircraft Cables
M24	Single Pendant Mount(3/4 Hub)
M**	Other Options Available*

Key.	Aircraft Length.	Key	Aircraft Length
5	5FT	15	15FT
10	10FT	20	20FT

Ex. **M305** would be Y-Toggle, 5FT

Modular Wiring

W27XYZC	Modular Power Cable
W22XY	Molex Row Mounting Wiring

See page 7

Warranty

CL7	10-Year Comprehensive Warranty Upgrade
-----	--

Documentation and Resources

All files and resources are available on our website for download. Files and resources are also embedded as links in this document, listed below. Additional files may be available upon request. Please contact your local sales agent [here](#) or contact sales@bjtake.com for more information.

-  BLSPT - Installation Instructions

 BLSPT-4FT-4.5L-840-L18.ies

 BLSPT-4FT-7.5L-840-L18.ies

 BLSPT-4FT-10.5L-840-L18.ies

 BLSPT-8FT-7L-840-L18.ies

 BLSPT-8FT-13L-840-L18.ies

 BLSPT-8FT-19L-840-L18.ies
-  BLSPT-4FT-2.5L-840-L18.ies

 BLSPT-4FT-5.5L-840-L18.ies

 BLSPT-4FT-8.5L-840-L18.ies

 BLSPT-4FT-11.5L-840-L18.ies

 BLSPT-8FT-9L-840-L18.ies

 BLSPT-8FT-15L-840-L18.ies

 BLSPT-8FT-21L-840-L18.ies
-  BLSPT-4FT-3.5L-840-L18.ies

 BLSPT-4FT-6.5L-840-L18.ies

 BLSPT-4FT-9.5L-840-L18.ies

 BLSPT-8FT-5L-840-L18.ies

 BLSPT-8FT-11L-840-L18.ies

 BLSPT-8FT-17L-840-L18.ies

 BLSPT-8FT-23L-840-L18.ies

Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

Icon	Description
	Wireless Controls Available
	DLC Listed
	ETL Listed
	90 and 95+ CRI Options Available
	120-347V(UN3) Available

Usage Applications

This fixture can be used in a variety of applications, and is ideal for the following:

Usage Application
Manufacturing Facilities
Storage
Offices
Schools
Retail Stores
Distribution Facilities
Processing Plants
Aisle Lighting

Warranty Statement

BJ Take products are tested and/or inspected prior to being packaged for shipment and are guaranteed from the day the product is shipped for a period of ten-year LED chip warranty and a five-year comprehensive component warranty. This can be upgraded to a ten-year comprehensive warranty on request.

Important Information

Below you will find the available wattage charts for the BLSPT. For any required specifications that are not listed here, please contact our sales team at sales@bjtake.com to request any additional information.

BLSPT, 1/2 Foot Wattage

Size	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per Watt
1'	1.12	1125	8.00	140.62
1'	1.38	1375	9.80	140.31
2'	1.75	1750	12.50	140.00
2'	2.25	2250	16.10	139.75
2'	2.75	2750	19.60	140.30

BLSPT, 4 Foot Wattage

Size	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per Watt
4'	2.50	2565	17.20	149.10
4'	3.50	3631	24.70	147.00
4'	4.50	4670	32.20	145.00
4'	5.50	5683	39.60	143.50
4'	6.50	6669	47.10	141.60
4'	7.50	7628	54.50	140.00
4'	8.50	8561	62.00	138.10
4'	9.50	9467	69.50	136.20
4'	10.50	10347	76.90	134.60
4'	11.50	11203	84.40	132.70


BLSPT, 8 Foot Wattage

Size	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per Watt
8'	5.00	5252	35.30	148.80
8'	7.00	7361	50.10	146.90
8'	9.00	9420	64.90	145.10
8'	11.00	11424	79.60	143.50
8'	13.00	13375	94.40	141.70
8'	15.00	15273	109.20	139.90
8'	17.00	17119	124.00	138.10
8'	19.00	18908	138.70	136.30
8'	21.00	20642	153.50	134.50
8'	23.00	22332	168.20	132.80


BLSPT, LLF (Light Loss Factor)

CCT	Output%
2700K	92.95
3000K	95.51
3500K	96.80
4000K	100.00
5000K	101.28
90CRI	84.72


BLSPT, 1 Foot Side Dims

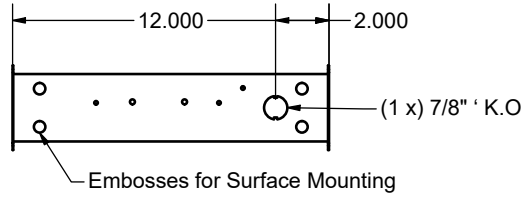


1FT End View




BLSPT, 2 Foot Side Dims

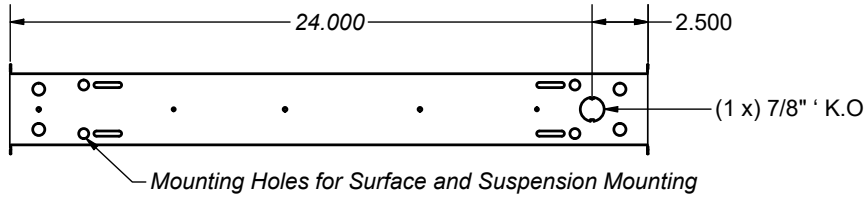


2FT End View




BLSPT, 4 Foot Side Dims

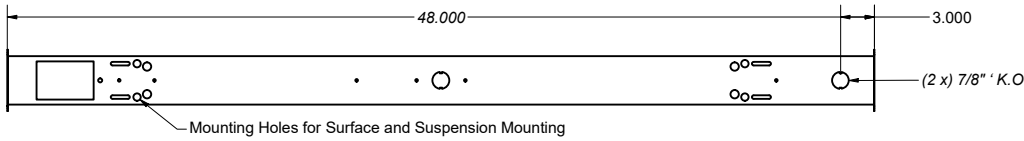


4FT End View



BLSPT, 8 Foot Side Dims



8FT End View




Specifications may change without notice
Standard tolerances apply
Drawings aren't to scale

- * Drawings aren't to scale
- * Standard tolerances apply
- * Specifications may change without notice

BLSPT-4FT-5.5L-840-L18

Cone of Light

Mtg Height	Light Level	Beam Diameter
6.0 ft	47.7 fc	17.5 ft
8.0 ft	26.8 fc	23.3 ft
10.0 ft	17.2 fc	29.1 ft
12.0 ft	11.9 fc	34.9 ft
14.0 ft	8.8 fc	40.8 ft
16.0 ft	6.7 fc	46.6 ft

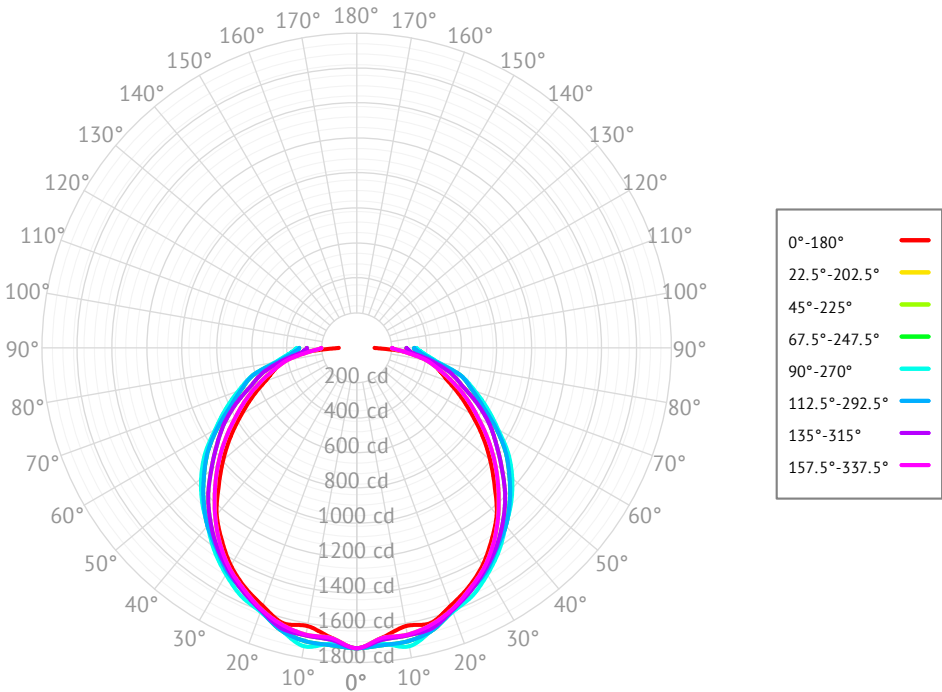


Based on 'BLSPT-4FT-5.5L-840-L18', ie. (BLSPT, 4 foot, 5500lm, 80 CRI, 4000K, w/ L18 Frosted Acrylic Lens)

BLSPT-8FT-11L-840-L18

Cone of Light

Mtg Height	Light Level	Beam Diameter
6.0 ft	91.3 fc	19.2 ft
8.0 ft	51.3 fc	25.6 ft
10.0 ft	32.9 fc	32.0 ft
12.0 ft	22.8 fc	38.4 ft
14.0 ft	16.8 fc	44.8 ft
16.0 ft	12.8 fc	51.2 ft

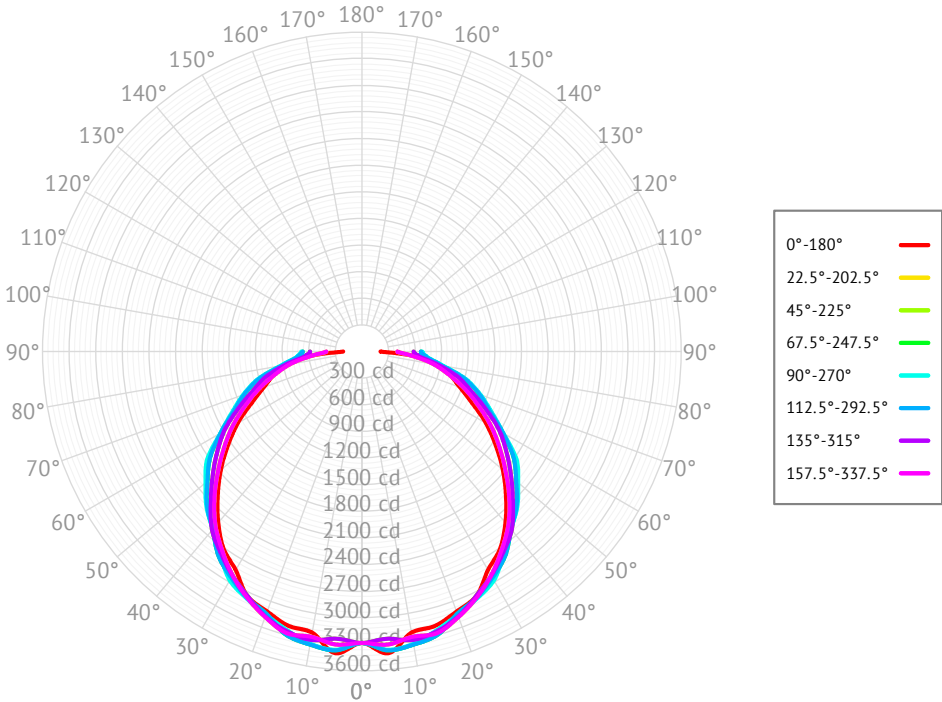


Based on 'BLSPT-8FT-11L-840-L18', ie. (BLSPT, 8 foot, 11000lm, 80 CRI, 4000K, w/ L18 Frosted Acrylic Lens)


Modular Wiring

The BLSPT has options for modular wiring. Below you will find the diagrams for these wiring options, and the relevant option codes necessary for ordering them.

W22XY - Molex Row Mounting Wiring

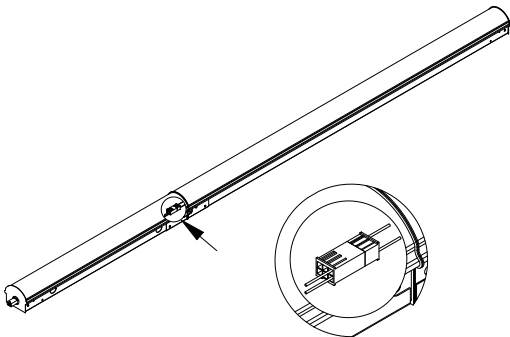

W27XYZC - Modular Power Cable

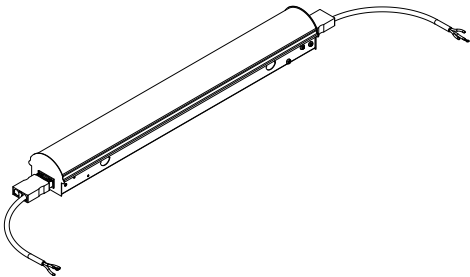

W22XY - Molex Row Mounting Wiring

X - Style	Y - Poles	Through-Wiring
E - End	3 - 3 Pole	Blank - None
.	4 - 4 Pole	(RowA) - Alternating Circuit A
.	5 - 5 Pole	(RowB) - Alternating Circuit B
.	6 - 6 Pole	.

Example: **W22E6** (see image above)

W27XYZC - Modular Power Cable


X - Style	Y - Poles	Z - Wiring	C - Colour
S - Side	3 - 3 Pole	Blank - Standard	Blank - White
E - End	4 - 4 Pole	E - End of Row	B - Black
T - Top	5 - 5 Pole	.	G - Grey
.	6 - 6 Pole	.	.

Example: **W27E3** (see image above)

Emergency Battery Plan - 6W/10W/15W

Emergency Lighting	Solution System Components	System Operation
Option Code 'B17/B24/B38' - UL 924 listed components that are factory installed in the luminaire	UL 924 listed 6/10/15 watt battery integral to the luminaire	Loss of normal power is detected by the 'BXX' emergency light solution and the power supply is switched automatically to the integral battery pack which powers the emergency LED lighting driver.
	UL 924 listed LED emergency lighting driver integral to the luminaire	The battery pack and emergency LED driver are UL 924 certified to provide a minimum of 90-minutes of emergency lighting.
	Wiring options for both switched and unswitched emergency lighting	.

Emergency Lighting Wiring

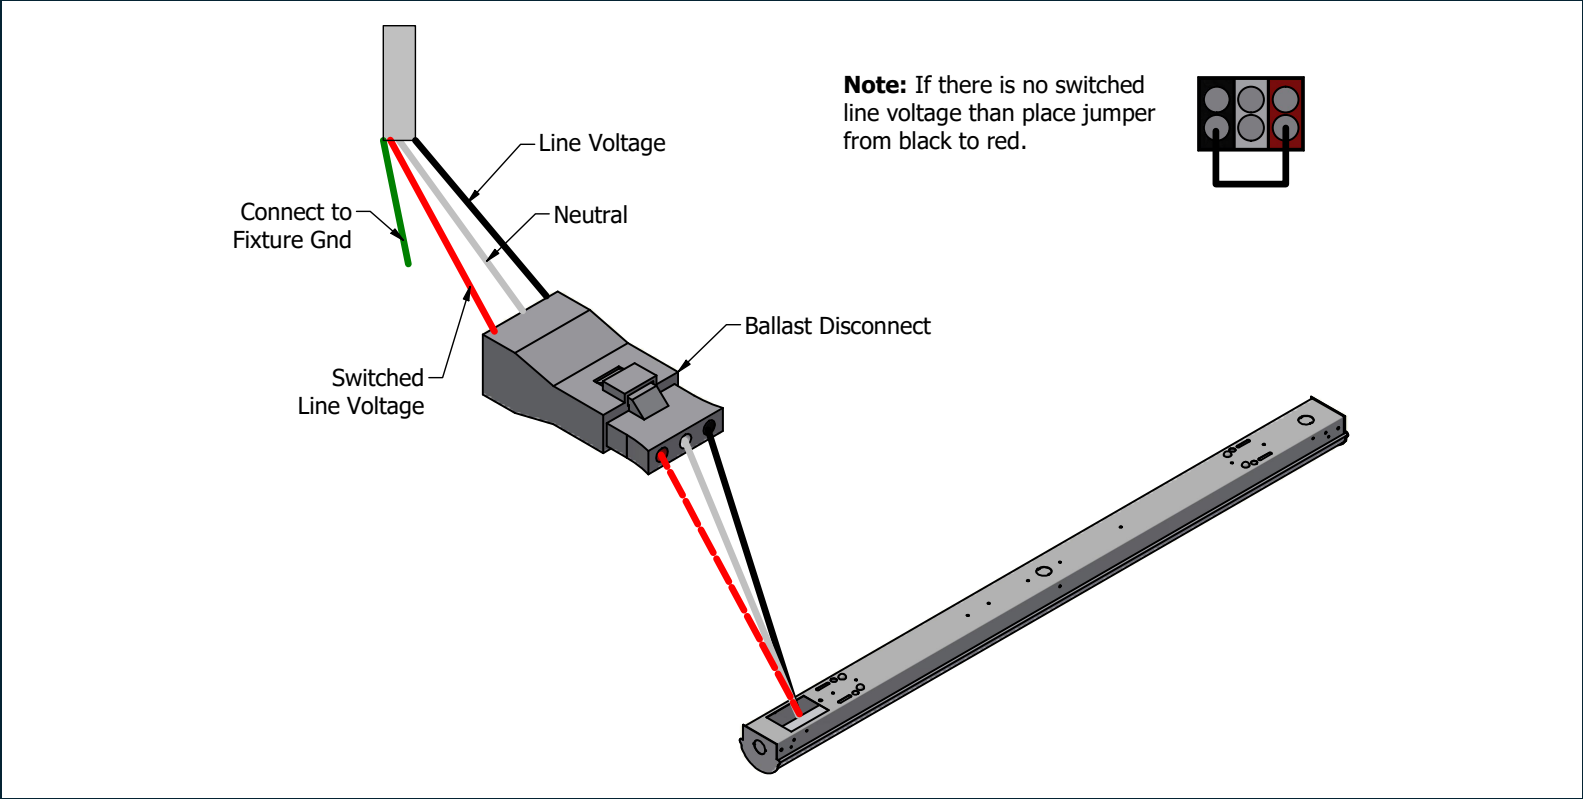

Important Information

More information on emergency lighting options and configurations available on request.