

<b>Project:</b>
<b>Type:</b>
<b>Date:</b>
<b>Product Code:</b>
<b>Approval:</b>



*Stylish performance with fluorescent lighting.*

**BFHL**

Industrial-grade, suspended-mount fluorescent high bay fixture. It has been designed for indoor use where high-efficiency, ease of installation and sturdy construction are primary considerations. Its multi-faceted reflector makes it ideally suited for general area illumination.

**FEATURES**

- Available in 4' or 8' lengths (custom sizes available)
- Pre-painted, high-reflectance white body
- Available with 1, 2, 3 or 4 lamp configurations
- T5 or T8 lamps

**OPTIONS**

- 4', 8' and custom lengths available (consult factory)
- Continuous row-mounting available
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- 1, 2, 3 or 4 lamps available
- T5 or T8

**APPLICATIONS**

- Retail stores
- Storage areas
- Warehouse facilities

**APPROVALS**

- ETL listed product

**OPTICS**

Pre-painted body in high-reflectance white. Multi-faceted reflector is manufactured to achieve optimal lamp performance. 1 to 4 lamp cross sections available to suit most applications. T5 and T8 light sources are available.

**ELECTRICAL**

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Lamp retention through rotary lamp holders.

**MOUNTING**

Can be row-mounted using a suspended or surface-mount configuration. Optional mounting is available with aircraft cable, chain or stem mounting. Optional mounting bracket for surface mounting.


**CONSTRUCTION**

Pre-painted, high reflectance white body is precision bent for added strength and rigidity. Knock-outs provide easy through wiring for row-mounted applications.




**PRODUCT DIMENSIONS**

**End View**



**Side View**

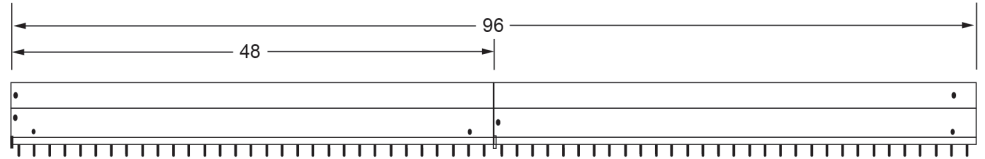

**PRODUCT KEY**

Fixture Type	Fixture Length	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFHL	<input type="text"/>	<input type="text"/> LP	<input type="text"/> W	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	4'	1	28	T5	120	Normal (N)	
	8'	2	32	T8	120/277 (UNV)	High (H)	
		3	54		347	Low (L)	
		4					
		6					
		8					

**OPTIONS**

<p><b>Battery Back-Up</b> (Needs to be specified)</p> <p><b>Hangers</b> M1 - Speedy Hanger (V-Bracket) M3 - Aircraft Cable "Y" Toggle With Cable Gripper (5, 10 and 15') M25 - Surface Mounting Bracket</p>	<p><b>Reflector</b> R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92%</p> <p><b>Sensors</b> W12 - Motion Sensor - 10C W26 - Motion Sensor with Photocell</p>	<p><b>Wire</b> W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p>
---	--	--

